


## Push-through protection for shelves 900 mm

P/N: 0117422 | RG-RS/N5 600kg 1600/400

**HUPFER**  
we make work flow

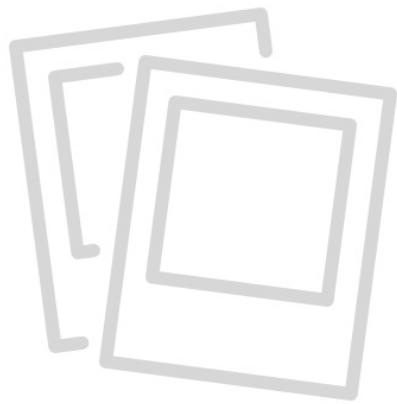

### Technical data

<b>Modular dimension:</b>	150 mm
<b>Max. section load</b>	600
<b>Carbon footprint (TM65 Basic Report)</b>	37 kgCO <sub>2</sub> e
<b>Weight:</b>	0.6 kg
<b>Width:</b>	899 mm
<b>Depth:</b>	25 mm
<b>Height:</b>	80 mm

*Similar to illustration, technical modifications reserved. Without decoration.*

Modular shelving system made of high-quality stainless steel 1.4301 in hygienic design as per DIN 18868-2, suitable for continuous use at -40 to +140°F (-40 to +60 °C), for arrangement in a straight line or for angled setup with corner hooks, freely extendable lengthwise.

Uprights made of 1.0 × 1.0" (25 × 25 mm) square tubes, connected and stabilised by press-fitted 2.0 × 0.08" (50 × 2 mm) upright spokes running crosswise. Upper covering caps made of plastic, height-adjustable screw feet for compensating floor unevennesses of up to 1.0" (25 mm) as hygienic ending of upright. Welded ø 0.28" (7 mm) shelf bolts at distances of 5.9" (150 mm) for easy attaching of shelves.

Time and date of the request:  
06.02.2026, 15:05:28

*All information / dimensions are approximate, technical changes reserved. © Hupfer*