


## Norm 20 dunnage rack 1000×500 mm

P/N: 0203422 | RG-BR/N20 1000/500/300

**HUPFER**  
we make work flow

### Technical data

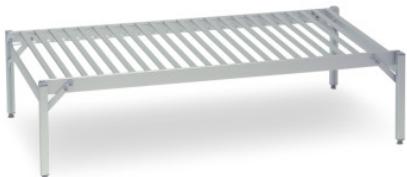

<b>Carbon footprint (TM65 Midlevel Report)</b>	89 kgCO <sub>2</sub> e
<b>TM65 Midlevel Report</b>	<a href="#">Link to the certificate</a>
<b>Weight:</b>	4 kg
<b>Width:</b>	1000 mm
<b>Depth:</b>	505 mm
<b>Height:</b>	305 mm

*Similar to illustration, technical modifications reserved. Without decoration.*

The floor shelf for the standing shelf provides a storage surface for food and all types of stored goods. It is suitable for continuous use at ambient temperatures from -40°C to +60°C.

The firmly pressed frame, serving as a base shelf for the upright shelving unit, is made of aluminium and is delivered disassembled for space-saving self-assembly. The base shelf provides an additional HACCP-compliant storage surface for foodstuffs and all types of stored goods. The frame features height-adjustable screw feet that easily compensate for any unevenness in the floor. The seamless pressed aluminium grate offers a secure, well-ventilated, and easy-to-clean additional storage surface capable of bearing heavy loads. With a cleaning-friendly height clearance from the floor, the base shelf is a welcome accessory for our Hupfer upright shelving units in the standard series.

Temperatures from -40°C up to +60°C pose no problem, even for prolonged periods.

- Firmly pressed frame ensures secure, well-ventilated, and hygienic storage of food as well as additional storage space
- Design with clearance from the floor simplifies cleaning
- Height-adjustable screw feet compensate for possible floor unevenness and ensure a stable base and secure storage surface
- High-quality aluminium workmanship allows for easy cleaning and perfect

Time and date of the request:  
08.02.2026, 05:49:36

*All information / dimensions are approximate, technical changes reserved. © Hupfer*

## Norm 20 dunnage rack 1000×500 mm

P/N: 0203422 | RG-BR/N20 1000/500/300

hygiene

- Valuable materials ensure sustainability and value retention
- Robust construction guarantees high load capacity