


# Stationary shelving set norm 12 with solid shelf

**HUPFER**  
we make work flow

P/N: N12GS48004002000 | TTW/V 2/24 EN 115-L

## Technical data

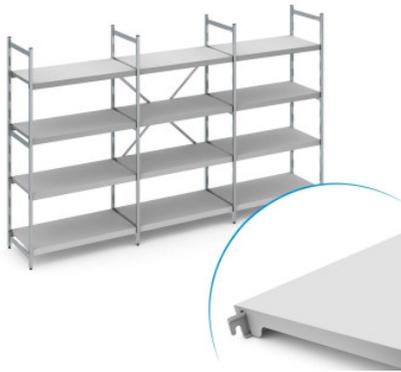

*Similar to illustration, technical modifications reserved. Without decoration.*

<b>Cleaning classification:</b>	Suitable for washing devices
<b>Maximum dimension:</b>	530 × 370 mm
<b>Capacity:</b>	24 EN trays
<b>Modular dimension:</b>	115 mm
<b>Insertion type:</b>	Lengthwise
<b>Max. bay load</b>	150
<b>Max. section load</b>	600
<b>Carbon footprint (TM65 Midlevel Report)</b>	929 kgCO <sub>2</sub> e
<b>TM65 Midlevel Report</b>	<a href="#">Link to the certificate</a>
<b>Payload:</b>	120 kg/265 lbs
<b>Castors:</b>	2 fixed castors, 2 swivel castors with lock □ 160
<b>Main construction:</b>	Closed, double-walled, two-part
<b>Design:</b>	Welded on inside
<b>Weight:</b>	69 kg
<b>Width:</b>	4725 mm
<b>Depth:</b>	400 mm
<b>Height:</b>	2000 mm

Tray transport cart for storing meal components on Euronorm trays.

Cart made entirely of high-quality stainless steel, self-supporting design. Double-walled tray transport cart closed on all sides, with welded interior suitable for washing devices. Wall and doors thermally insulated CFC-free. Double-walled double-wing doors, can be opened by 270°, automatic closing mechanism, operation with one hand. Additional locking at 255° to prevent areas from being left unrinsed in the cart washing device. Door lock through integrated 2-point locking. Welded interior with two partitionments for 12 EN trays each, for lengthwise insertion. Side panels with seamless deep-drawn shelf beads as tray shelves at height intervals of 4.53" (115 mm), with additional stamped tilt protections. Four continuous vertical push bars (2 on each side) for manoeuvring even with the doors open. Dimensionally stable chassis design, suitable for delivery transport. In

Time and date of the request: 08.05.2026, 03:43:50 *All information / dimensions are approximate, technical changes reserved. © Hupfer*

## Stationary shelving set norm 12 with solid shelf

**HUPFER**  
we make work flow

P/N: N12GS48004002000 | TTW/V 2/24 EN 115-L

In addition, the use in automatic cart transport is possible. Bumper protective feature provided by two robust continuous bumper strips at the chassis, effective also when doors are open. Cart runs on 2 swivel casters with total lock, 2 fixed casters, fastened by means of screw-on plates and four screws.

- solid polymer shelf with low weight ensures safe, hygienic storage and clear access at all times
- high-quality polymer workmanship allows for easy cleaning and perfect hygiene. It is even dishwasher safe.
- modular system allows for any design and extension and ensures the most efficient use of space
- valuable materials ensure sustainability and value retention
- robust construction guarantees high stability and high load-bearing capacity
- modular system ensures easy handling from assembly to cleaning with little effort

Time and date of the request:  
08.05.2026, 03:43:50

*All information / dimensions are approximate, technical changes reserved. © Hupfer*