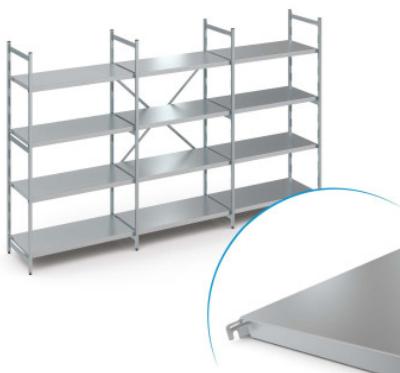


**Stationary shelving set norm 20 with solid shelf****Технические характеристики изделия N20GS41003001200 | RTW/Z**

14-5/900

**Технические характеристики**

<b>Размер ячейки:</b>	150 mm
<b>Carbon footprint (TM65 Basic Report)</b>	772 kgCO <sub>2</sub> e
<b>Полезная нагрузка:</b>	200 kg
<b>Масса:</b>	36 кг
<b>Ширина:</b>	4025 mm
<b>Глубина:</b>	300 mm
<b>Высота:</b>	1200 mm

Показан пример без декоративных элементов,  
точность технического описания не  
гарантируется.

Displaceable shelf made of high-quality stainless steel in hygienic design as per DIN 18868-2.

Uprights made of 1.0 x 1.0" (25 x 25 mm) square tubes, connected and stabilised by press-fitted 2.0 x 0.12" (50 x 3 mm) upright spokes running crosswise. Upper covering caps made of plastic, as hygienic ending of upright. Welded ø 0.28" (7 mm) shelf bolts at distances of 5.9" (150 mm) for easy attaching of shelves. Shelves in hygienic design for easy cleaning. Stiffening through four 2.0 x 0.8 x 0.06" (50 x 20 x 1.5 mm) long rails. 4 polyethylene disc bumpers serve as bumpers and protect trolley on all sides as well as building-side walls from being damaged. Mobile shelving unit with 4 swivel casters of which two with total lock, ø 4.9" (125 mm), with back-hole fastening.

The Hupfer mobile shelving unit RTW/Z 14-5/900 features extensive equipment options, allowing a wide range of individual options for use as well as adjustment options for diverse space requirements and temperature conditions.