


## Stationary shelving set norm 5 with solid shelf

**HUPFER**  
we make work flow

Технические характеристики изделия N5GS48006001200 | STW/M 6StE  
0985/751/1471

### Технические характеристики

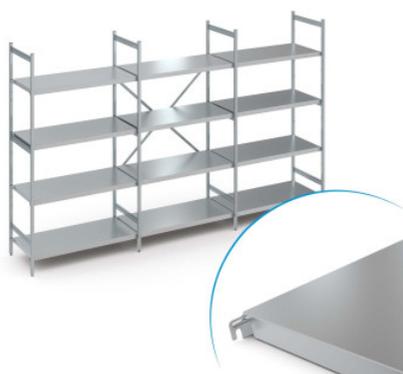

<b>Размер ячейки:</b>	150 mm
<b>Carbon footprint (TM65 Basic Report)</b>	1029 kgCO <sub>2</sub> e
<b>Полезная нагрузка:</b>	120 kg
<b>Масса:</b>	108 кг
<b>Ширина:</b>	4725 мм
<b>Глубина:</b>	600 мм
<b>Высота:</b>	1200 мм

*Показан пример без декоративных элементов, точность технического описания не гарантируется.*

Sterile supply transport trolley for transport and storage of standardised sterile supplies containers and baskets. 160 mm stainless steel castors as standard.

Trolley made entirely of high-quality stainless steel, robust, self-supporting standard design. Single-walled transport trolley closed on all sides. The transport trolley is loaded on the long side via two double-walled double-wing doors that can be opened at an angle of 270°. The automatically-latching doors are attached to robust stainless steel hinges mounted on vertical push bars. A transport latch and integrated sealing option in the upper section of the door, in combination with extensions to block the door lower edges, keep the doors safely closed during transport. The left door is additionally fitted with a stop bead, so together with the trolley profiling and the extra hygienic and easy to clean lip seals, optimum dust protection for the items to be transported is guaranteed. Extensions also serve to keep the doors open during loading, so no additional elements to be operated by a hand or foot are required. Rear wall with triple rolled bead for stiffening and sound insulation. Interior with continuous vertical slotted rails in the corner sections, enabling shelves to be attached to free-standing shelving units across the entire interior height using hook-on elements, e.g. solid shelves, wire shelves and wire shelves with 1/3 extension. Four continuous vertical push bars (2 per side) for manoeuvring even with the doors open. Inherently stable chassis design, suitable for delivery transport and adaptable to automatic trolley transport systems. Bumper protective feature provided by robust, continuous bumper strip that is effective even with the doors open, with frontal recesses for connecting a towing device to the chassis. Trolley runs on 2 swivel casters with total lock, 2 fixed casters, fastened by means of screw-on plates and several screws.

Дата обращения: 09.05.2026,  
05:53:24

*Значения величин и размеров являются приблизительными, точность технического описания не гарантируется. © Hupfer*

## Stationary shelving set norm 5 with solid shelf

**HUPFER**  
we make work flow

Технические характеристики изделия N5GS48006001200 | STW/M 6StE  
0985/751/1471

Equipped with:

- modular design
- 2 solid shelves
- height-adjustable in 61.5 mm pitch
- paper clamp, right-hand door
- status display, left-hand door
- transport latch with sealing flap
- hinged doors with 270° opening angle
- all-round door seal
- all-round impact protection at the bottom
- Ø 160 mm castors with stainless steel housing and mounting plates
- 2 fixed castors, 2 swivel castors with total lock brake

Дата обращения: 09.05.2026,  
05:53:24

*Значения величин и размеров являются приблизительными, точность  
технического описания не гарантируется. © Hupfer*